

Bullet & Mini Camera

Features

- Ultra-mini and compact size
- Option Board Lens, Pinhole Lens or Cone Lens
- DC voltage
- Furnished with U type holder and cable (for RYK-2Dxx, RYK-28xx)
- Weatherproof (for RYK-2739)




RYK-28xx
(Board Lens)




RYK-2Dxx




RYK-2739



RYK-28xx



RYK-2Dxx

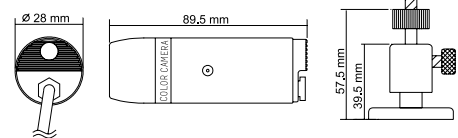

RYK-2739

Model No.	RYK-2739	RYK-2D55A	RYK-2849	RYK-2847
		RYK-2D56A	RYK-2850	RYK-2848
Image Device	1/4" Color Sony Super HAD	1/3" Color CCD	1/3" Color Sony Super HAD II	1/4" Color Sony Super HAD
Picture Elements(HxV)	NTSC:510x492, PAL:500x582	NTSC:512x492, PAL:512x582	NTSC:510x492, PAL:500x582	NTSC:510x492, PAL:500x582
Resolution	330 TVL	420 TVL	420 TVL	330 TVL
Min. Illumination	0.1 Lux / F1.2	0.4 Lux / F1.2	0.01 Lux / F1.2	0.1 Lux / F1.2
S/N Ratio	More than 48dB			
Electronic Shutter	NTSC:1/60~1/100,000, PAL:1/50~1/110,000	NTSC:1/60~1/100,000, PAL:1/50~1/100,000	NTSC:1/60~1/100,000, PAL:1/50~1/110,000	EIA:1/60~1/100,000, CCIR:1/50~1/110,000
Gamma	0.45			
Lens Furnished	RYK-2D55A/2849/2847: Board Lens 3.6mm / F2.0 (option:2.5/4.3/6/12mm) RYK-2850/2848: Pinhole Lens 3.7mm / F2.0 (option:4.3mm) RYK-2739: Board Lens 3.6mm / F2.0 (option:6/12mm) RYK-2D56A: Cone Lens 3.8mm / F2.0			
White Balance	Auto			
Gain Control	Auto			
Sync. System	Internal			
Video Output	1 Vp-p / 75 Ohms			
Audio Output	2 Vp-p / 50 Ohms (option, for RYK-2xxxA)			
Power Supply	DC12V±10%			
Power Consumption	117mA max.	125mA max.	117mA max.	
Operating Temp.	-10°C ~ 50°C			

* Audio function is available for RYK-2739A.RYK-2DxxA.RYK-28xxA